
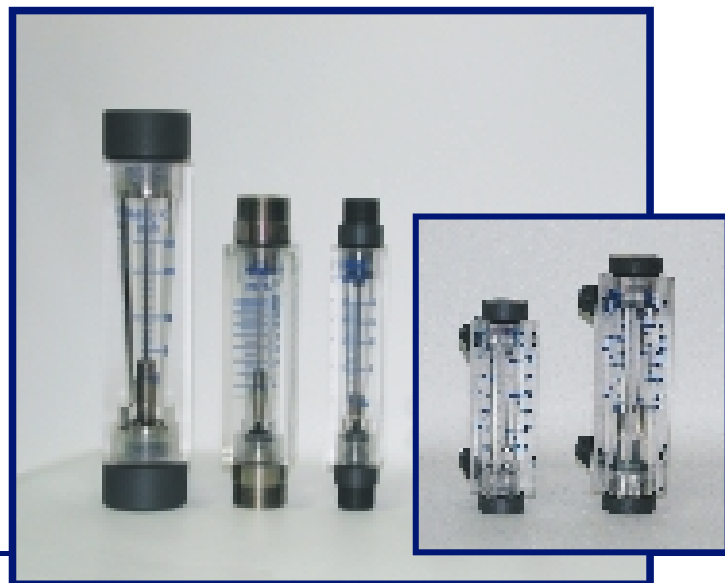


Mod. "R" e "PL"

PLEXIGLASS FLOWMETERS FOR MEDIUM FLOW "R" AND "PL"

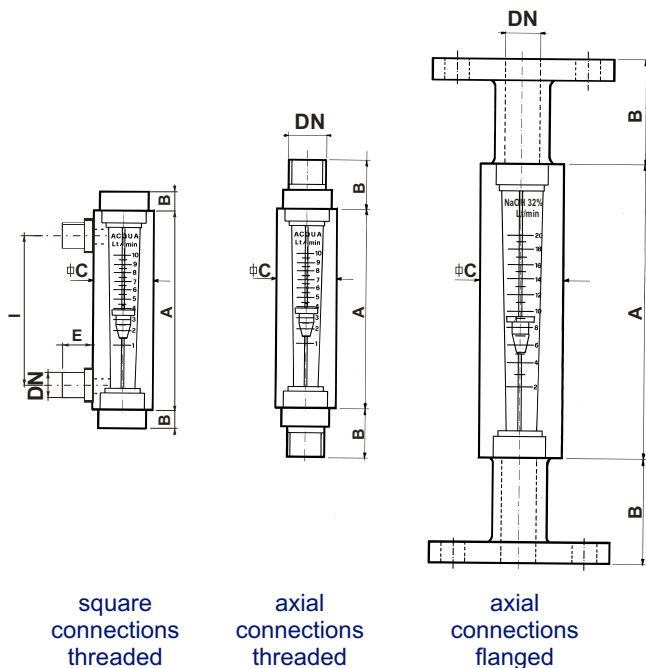

TIPO	portate standard		attacchi filettati				attacchi flangiati					
	WATER Lt/h	AIR P.A. Nmc/h	threaded connections				flanged connections					
			DN	A	B	C	DN	A	B	C		
R1	120	6										
	200											
	300	8	1/2"	127	35	35	15	127	60	35		
	400											
	500	10										
R2	600		1/2"				15					
	800	15										
	1200		3/4"	160	40	40	20	160	80	40		
	1500	25										
	2000		1"				25					
R3	3000		1"	190	40	40	25	190	80	45		
R4	4000	40										
	6000	60	1"	190	40	40	40	190	80	60		
	8000		1 1/4"									
	12000	100	1 1/2"									

TIPO	portate standard		attacchi filettati				attacchi flangiati					
	WATER Lt/h	AIR P.A. Nmc/h	threaded connections				flanged connections					
			DN	A	B	C	DN	A	B	C		
PL1	200	6										
	400	8	1/2"	180	35	35	15	180	60	35		
	600	10										
PL2	800	15	1/2"				15					
	1200		3/4"	220	40	40	20	220	80	40		
	2000	25	1"				25					
PL3	4000	40	1"	260	40	45	25	260	80	45		
PL4	6000	60	1 1/2"	260	40	60	40	260	80	60		
PL5	10000		1 1/2"				40					
	15000	100	2	260	40	75	50	260	80	75		
	20000											
	30000		2 1/2"				65					

TIPO	SQUARE CONNECTIONS					
	DN	A	B	C	E	I
R1	3/8" - 1/2"	127	15	35	35	95
R2	1/2" - 3/4" - 1"	160	15	40	35	115
R3	3/4" - 1"	190	15	45	40	125

TIPO	SQUARE CONNECTIONS					
	DN	A	B	C	E	I
PL1	3/8" - 1/2"	180	15	35	35	145
PL2	1/2" - 3/4" - 1"	220	15	40	35	175
PL3	3/4" - 1"	260	15	45	40	195

PLEXIGLASS FLOWMETERS FOR MEDIUM FLOW "R" AND "PL"

The "R" and "PL" series flowmeters are produced entirely in Plexiglas with a calibrated and polished conical measuring hole obtained directly in the structure. The guided or free float is produced in different materials: AISI 316, Hastelloj, PVC, PTFE, Moplen etc.

They are provided, on request, with axial or angle, flanged or threaded connections. The precision of the instrument is: $\pm 5\%$ fs.

The test pressure is 10 bars.

They can be produced, on request, for PN16, PN25, PN40.